

EAGLE STRIKE





PART III


USA F-84 Thunderjet

4 8 2 1 5

USA F-84 Thunderjet

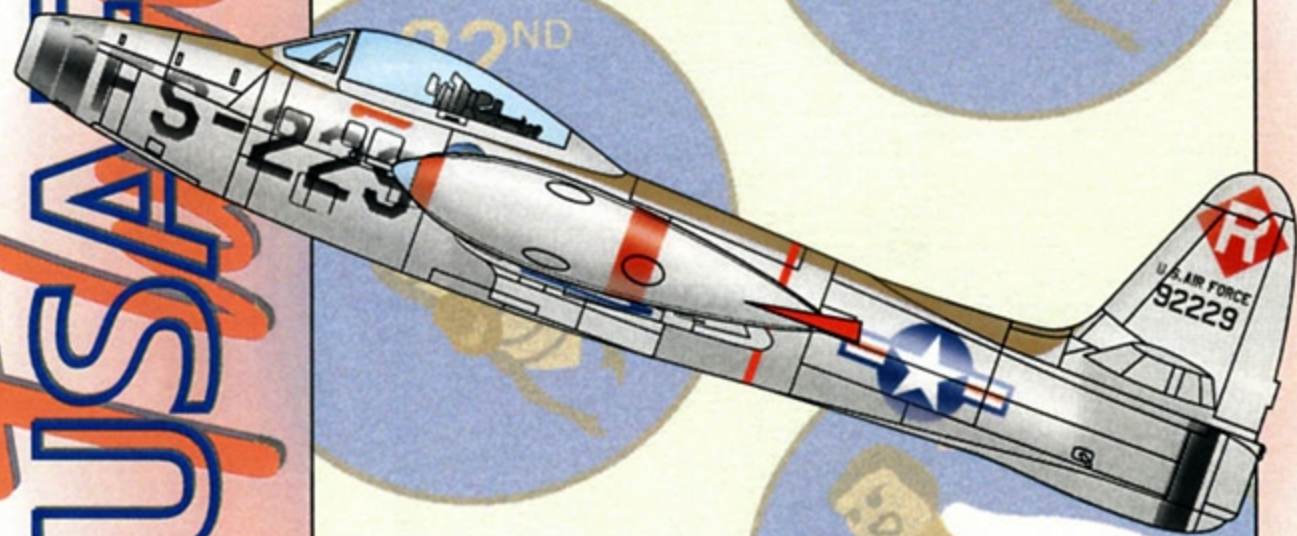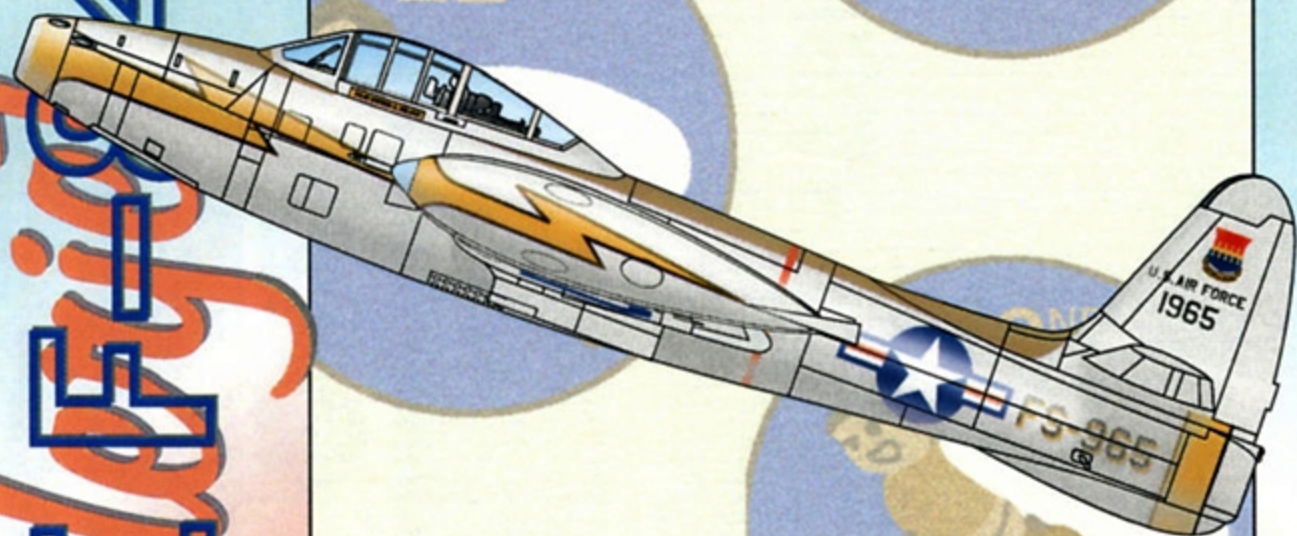

Suggested Kit: . Tamiya F-84G Thunderjet.
. Revell F-84E Thunderjet.

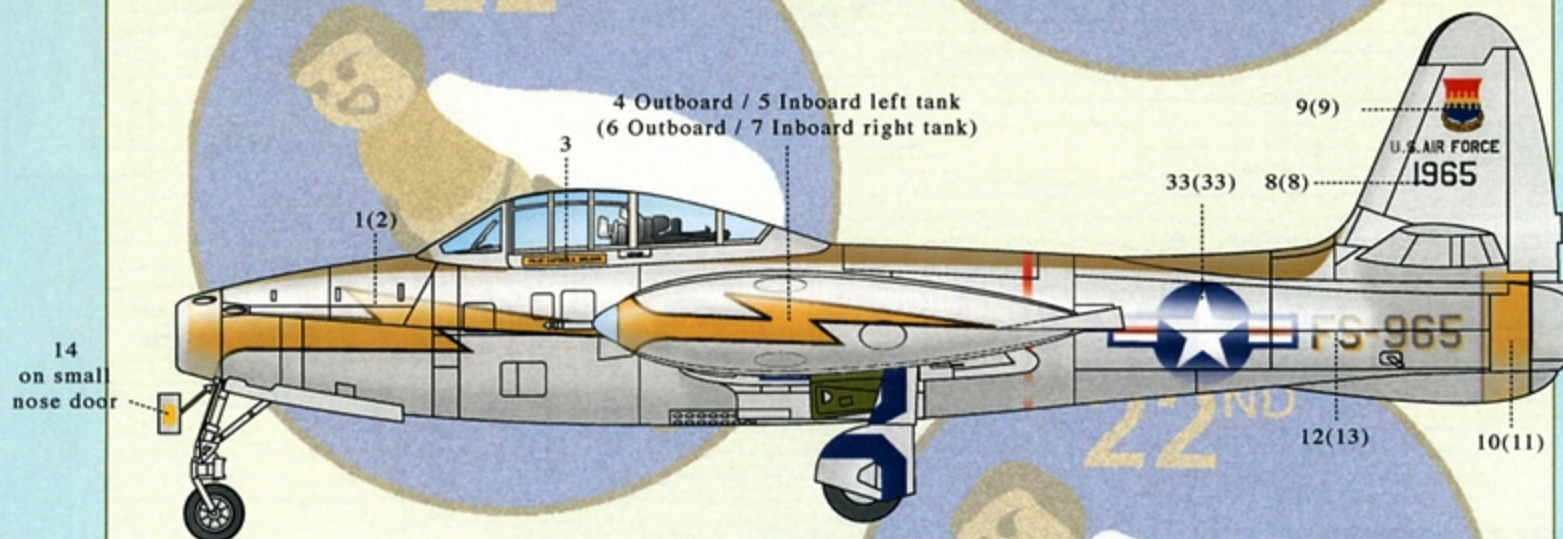

Aircraft 1 - F-84G-1-RE 51-965, 79th Fighter Bomber Squadron, 20th Fighter Bomber Wing, RAF Weathersfield, 1952-54. Overall natural metal, Olive Drab antiglare panels. Gray and Black fin tip. Apply wingtip tank decals and trim before attaching clear lenses.


Aircraft 2 - F-84E-5-RE 49-2229, 22nd Fighter Bomber Squadron, 36th Fighter Bomber Wing, USAF. Overall natural metal, Olive Drab antiglare panels. Wingtip tanks overall Natural Metal with Red bands and fins. Group insignia (Decal 24) carried in same position on right side of fuselage as Squadron insignia (Decal 23). Note Red tank fins, modeller must paint. Clear unreinforced canopy

26 Outboard left tank / 27 Inboard
 (28 Outboard right tank / 29 Inboard)

30 Left tank
 (31 Right Tank)


AIRES
 Aires offers super-detailing accessories for this and many other subjects in their range. Check our website at www.Aeromaster.com for this and many other wonderful products; Available To You Now!

15(16) on small nose door


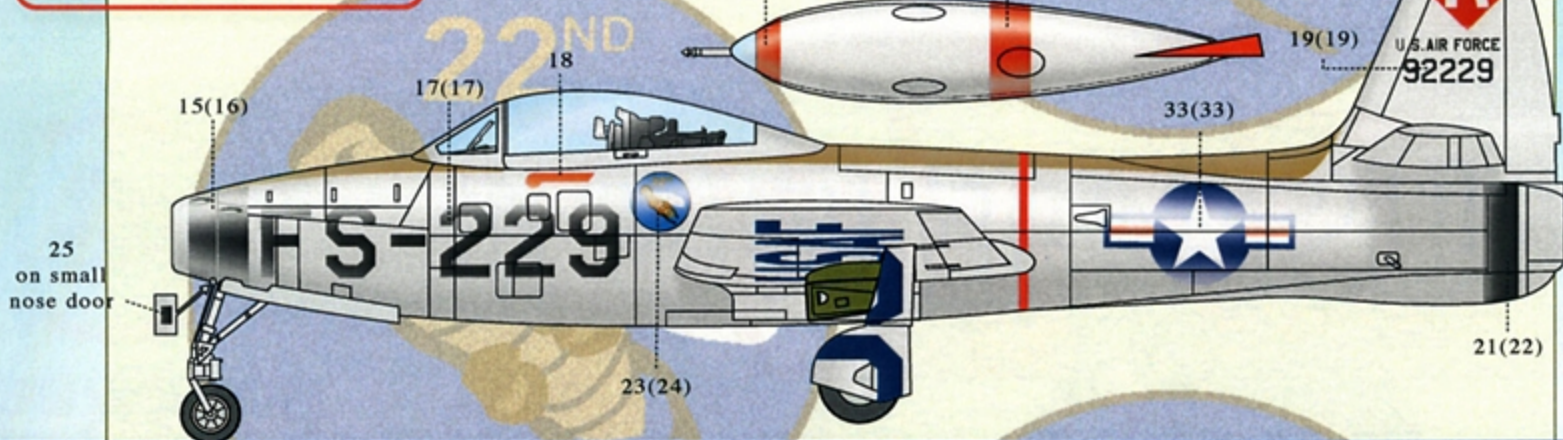


Note:
 Bright Natural Metal inner tank tips.

Suggested Kits:
 . Before Centuries, Dave Menard USAF.
 . USAF Europe S/S 1982 Rob Robinson.
 . Republic F-84 Thunderjet, Schiffer 1998.

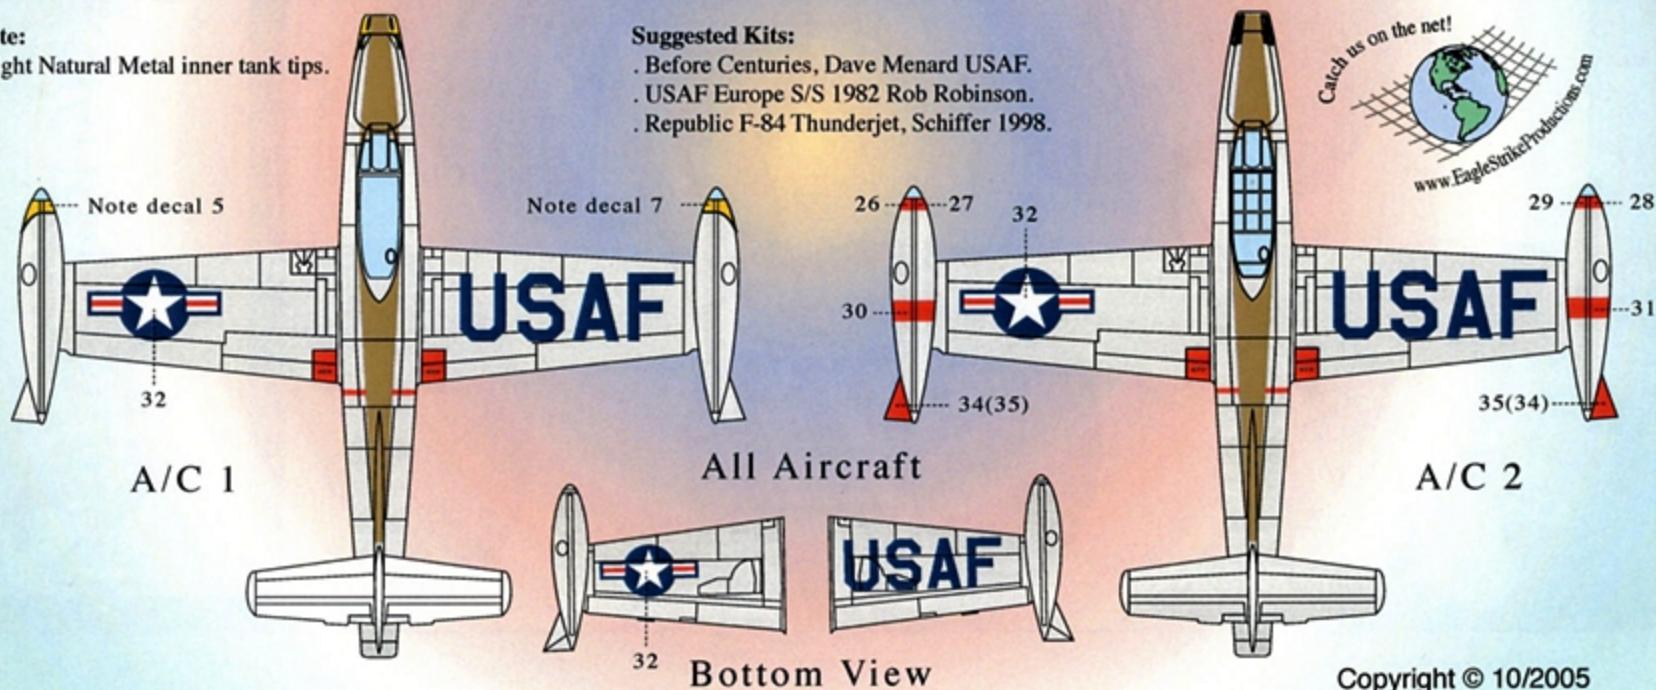

The set of stencils we provide are designed for Tamiya's F-84G. The Revell F-84E has a good stencil sheet and does not need duplication.

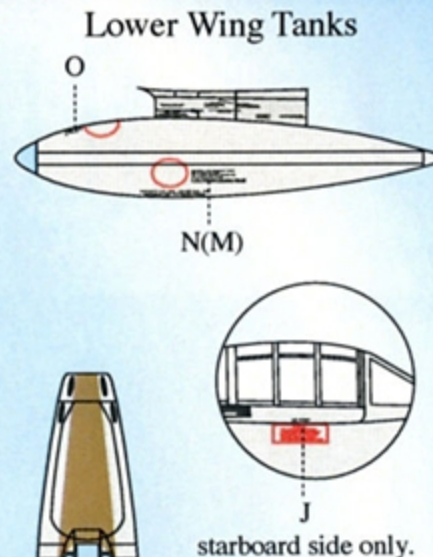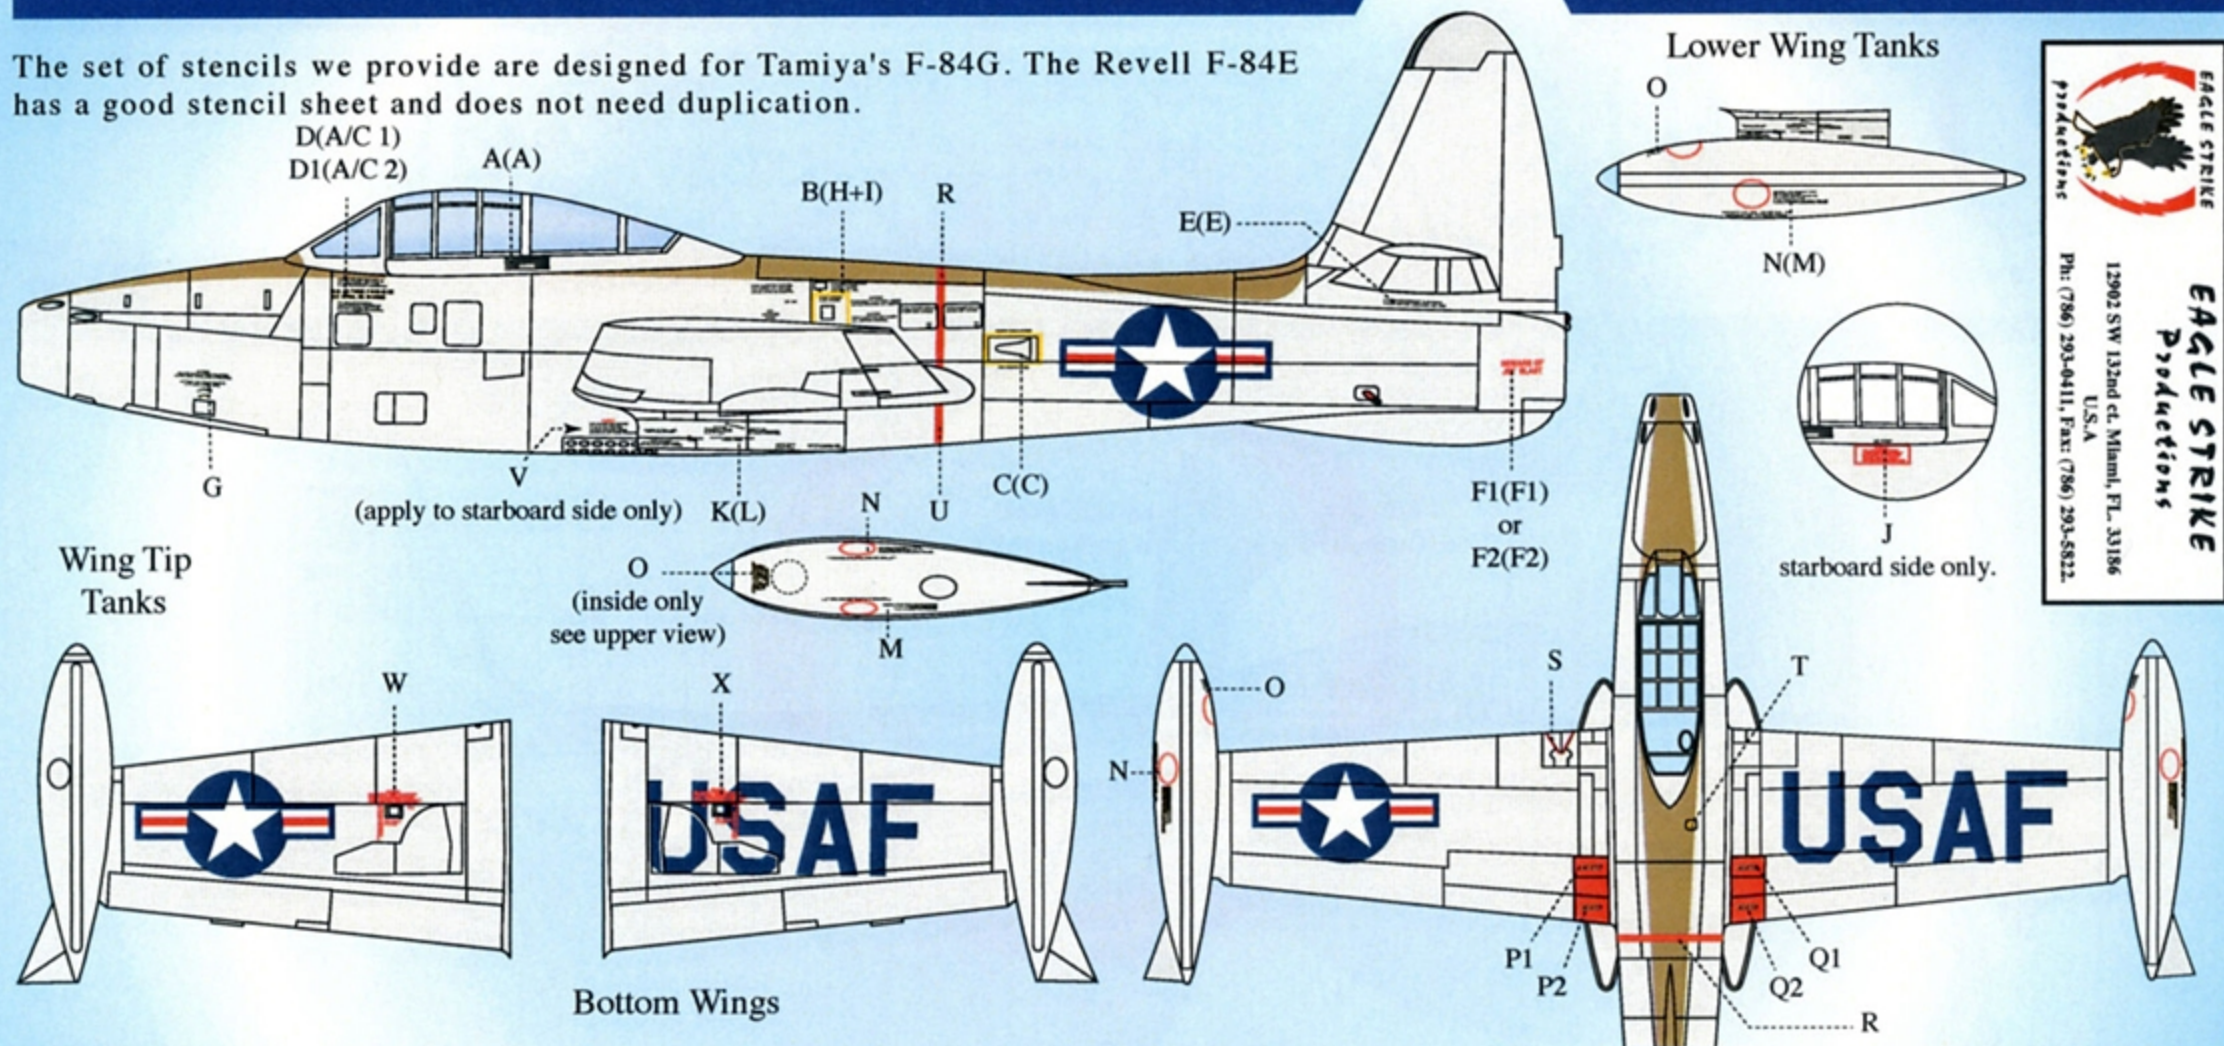

EAGLE STRIKE Productions

12902 SW 132nd Ct. Miami, FL, 33186
 U.S.A.
 Ph: (786) 293-0411, Fax: (786) 293-5822

EAGLE STRIKE Productions

Decaling: Apply decals only to a glossy surface.

1. With a sharp scissors or knife, carefully cut item to be used, being careful of not cutting off the clear film around it or that belonging to an adjacent item.
2. Submerge in clean tap water for over 10 seconds and lay over an absorbent paper towel. Decal will slide freely in about 20 seconds. Do not leave decal on water bowl over ten seconds, or adhesive quality will suffer.
3. With a clean brush, apply a setting solution to the area where the decal will finally lay. (Micro, Super or Aero Set will do). With a clean pointed brush slide the decal on to the final area. Allow the setting solution to dry for about 3-5 minutes.
4. With another clean brush, apply a solvent solution over the decal (Micro, Super or Aero Sol will do). Do this if possible in one stroke since your decal will soften up and wrinkle immediately. This is an important step in the process, whatever you do **DO NOT TOUCH THE DECAL**, after this process until it is totally dry, preferably overnight.
5. When thoroughly dry, rinse your model with tap water and mild soap to wash of excess glue.
6. Finish your model with the desired final coat (gloss, flat, or semi-gloss).