


INSTRUCTIONS FOR ASSEMBLING SPITFIRE ALL PLASTIC 1/4 INCH SCALE MODEL

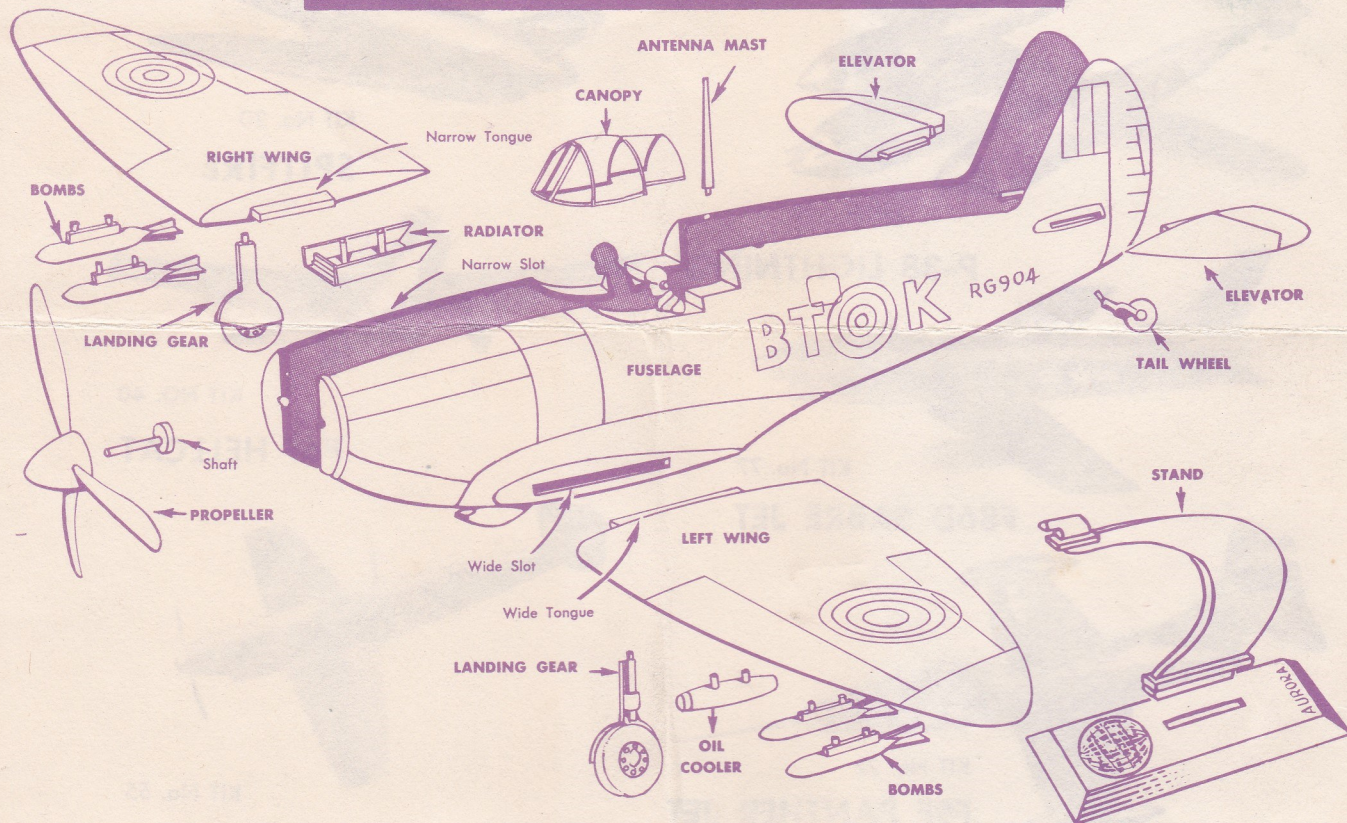

Before assembling the SPITFIRE, carefully study above sketch and place all parts on work table as indicated.

IMPORTANT:— APPLY CEMENT TO INSIDE SURFACES ONLY. AVOID GETTING CEMENT ON OUTER SURFACES OF PLANE SECTIONS.

In order to obtain maximum strength and neatness it is suggested that all cemented sub-assemblies be given ample time to dry before further handling.

1. Cement both parts of stand together and allow to dry.
2. Cement propeller shaft to propeller and allow to dry.
3. Cement right and left wing to fuselage by inserting wing tab into slot in fuselage section and applying cement on the inside. Set aside to dry.
4. Cement elevators to fuselage by inserting elevator tab into slot in rudder and applying cement on the inside.
5. Cement fuselage and wing sub-assemblies together by applying cement to edges of fuselage halves, being careful not to get any cement near or around propeller shaft hole— **IMPORTANT:** Place propeller and shaft assembly into proper position in fuselage before joining fuselage halves.
6. Cement cockpit canopy by applying cement to edges and press firmly into place.
7. Cement radiator (square shaped piece) to underside of right wing by applying a small drop of cement to pegs on radiator and inserting same into corresponding holes (closest to fuselage) in right wing.
8. Cement oil cooler (cigar shaped piece) to underside of left wing in holes closest to fuselage.
9. Cement bombs to underside of left and right wings using same procedure as for radiator and oil cooler.
10. Cement landing gear to underside of left and right wings by applying a small drop of cement to small peg on landing gear and inserting same into corresponding holes in wings.— **NOTE:**— Place plane in upside down position and hold or prop landing gear in proper position until cement has enough time to set or dry.
11. Cement tail wheel to underside of fuselage assembly. Use same procedure as in cementing landing gear.— **NOTE:**— Allow landing gear and tail wheel to dry thoroughly before any further handling.

12. Cement ANTENNA MAST by applying cement to broad end of mast and place into slot on top of fuselage.
13. Apply cement to tab on arm of base and place into slot on underside of fuselage and hold or prop into position until dry.
14. Cut out sections of decals to correspond with markings on plane. Read directions on back of decals before applying.

Allow to dry before further handling.

LOOK FOR OTHER ALL PLASTIC MODELS BY AURORA


F9F Panther Jet, F90 Lockheed, P-40 Flying Tiger,
ME109 Messerschmitt, F86D Sabre Jet, Russian Yak-25, Jap Zero,
USS Nautilus Atomic Submarine, P-38 Lightning and others.



**THIS CEMENT
MAY BE PURCHASED
FROM YOUR DEALER!**

AURORA
PLASTICS CORP. WEST HEMPSTEAD, L. I., N. Y.

EASY TO ASSEMBLE 1/4" SCALE MODELS

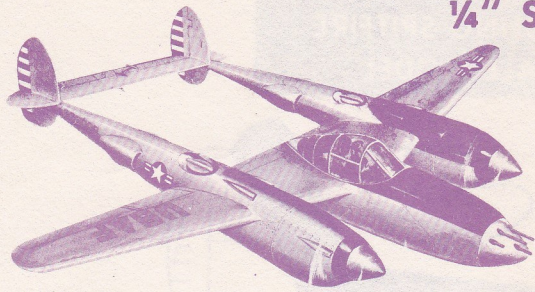


KIT No. 99

P-38 LIGHTNING




KIT No. 20

SPITFIRE

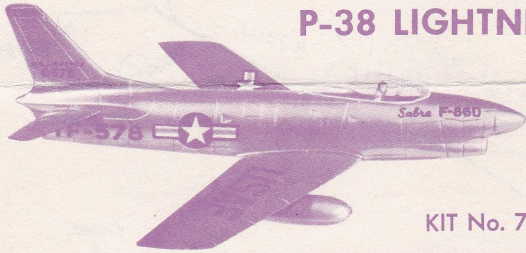

KIT No. 77

F86D SABRE JET

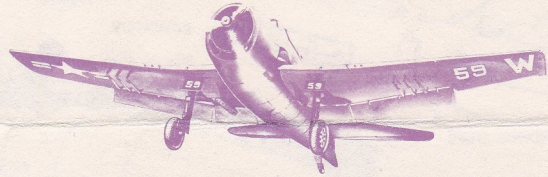


KIT NO. 40

F6F HELLCAT




KIT No. 22

F9F PANTHER JET

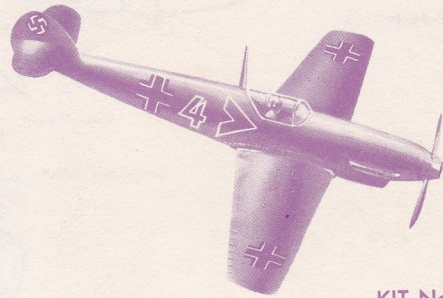

KIT No. 55

ME109 MESSERSCHMITT

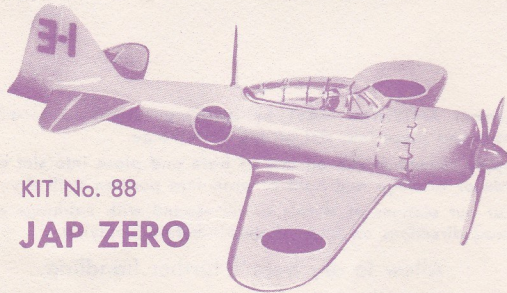

KIT No. 88

JAP ZERO



KIT No. 66

RUSSIAN MIG 19

FORMERLY IDENTIFIED AS YAK 25



KIT No. 33


F90 LOCKHEED JET



KIT No. 44

FLYING TIGER

(Curtiss P40)

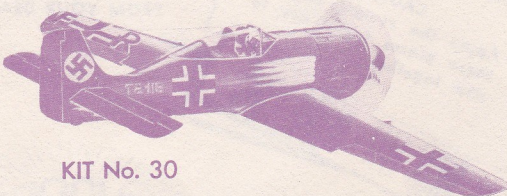

KIT No. 30

FOCKE WULF



No. 10

CEMENT