


F-5A NORTHROP

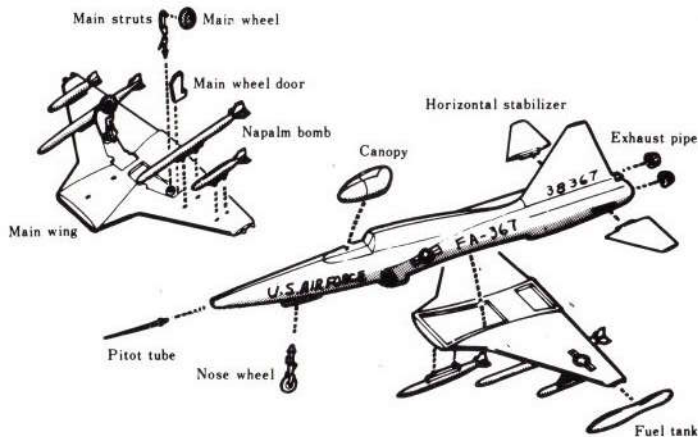

Before assembling model, study sketch carefully. Use cement very sparingly and any excess plastic should be carefully cut away with a sharp knife.

- 1) Cement fuselage halves together.
- 2) Cement canopy over cockpit of fuselage, horizontal stabilizers and exhaust pipes to fuselage tail section and pitot tube to nose of fuselage as shown respectively.
- 3) Cement nose wheel to underside of fuselage by inserting tab into corresponding hole of fuselage.
- 4) After cementing main wheels to main struts, cement this assembly to underside of wings. Cement main wheel doors to wheel assemblies.
- 5) Cement missiles and napalm bombs to underside of wings and fuel tanks to the edge of wings as shown. Cement wing assemblies to fuselage.
- 6) Place Decal into water for 1 minute, then place on model. Slowly remove paper by sliding.